

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
29 August 2002 (29.08.2002)

PCT

(10) International Publication Number
WO 02/066551 A1

(51) International Patent Classification⁷: **C08K 5/00**,
5/13, 5/52, 5/17

(21) International Application Number: PCT/IB02/00521

(22) International Filing Date: 20 February 2002 (20.02.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0104371.0 22 February 2001 (22.02.2001) GB

(71) Applicant (*for all designated States except US*): **CLARIANT INTERNATIONAL LTD** [CH/CH]; Rothausstrasse 61, CH-4132 Muttenz 1 (CH).

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **KRÖHNKE, Christoph** [DE/DE]; Kleingasse 23, 79206 Breisach (DE).

(74) Agent: **DÜNNWALD, Dieter**; Clariant International Ltd, Rothausstrasse 61, CH-4132 Muttenz 1 (CH).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: COLOR IMPROVING STABILIZING COMPOSITIONS COMPRISING LEUCINE

(57) Abstract: The present invention relates to a stabilizer composition comprising a) at least one sterically hindered phenol, b) at least one phosphorus-containing secondary antioxidant, and c) at least one Leucine compound, wherein the weight ratio of component (a) to component (b) to component (c) is from 1:5:3 to 1:0,5:0,1 for the stabilization of polyolefine-based thermoplastic polymers against degradation, crosslinking and/or discoloration due to the exposure to heat and/or light, especially in the presence of oxygen.



WO 02/066551 A1

COLOR IMPROVING STABILIZING COMPOSITIONS COMPRISING LEUCINE

5 The invention relates to color improving stabilizing compositions comprising Leucine for processing of polyolefine-based thermoplastic polymers.

During processing into articles, thermoplastic polymers are subjected to high temperatures and pressures which can have an adverse effect on the molecular weight and physical properties of the polymers and on the appearance of the finished articles
10 made from these polymers. Therefore, there is a need for antioxidant and color stabilizing additives which minimize oxidation and discoloration.

Common stabilizer systems consist of organophosphites and -phosponites and sterically hindered phenolic antioxidants and/or optionally amines, which are able to
15 prevent or to retard deleterious processes.

Degradation processes go along with varying structural features within the polymer such as the formation of conjugated functionalities consisting of conjugated vinylidene- and carbonyl groups. Moreover, discoloration of polymers containing sterically hindered phenolic antioxidants are affected by colored transformation products of these additives
20 containing quinoid structures. [References: P.P.Klemchuk and P.-L.Horng, Polym. Degr. Stab., 7, 131 (1984); T.J. Herman in "Development in Polymer Stabilization", Part 1, ed. G.Scott, Appl. Sci. Publ. Ltd., London, page 39 (1979); J.Scheirs, S.W.Bigger and O.Delatycki, Polymer 30, 2080 (1989)]. Its extent depends on structure and
25 consumption of phenols. Discoloration of polyolefins is particularly pronounced by continuous contact with water or NO_x-gases. A further origin of color is discussed to be redox-reactions and/or complex-formation of metal residues -deriving from catalysts used for the polymer-manufacture- with stabilizers or transition products of stabilizers.

30 Despite the fact that suitable combinations of organophosphites and/or -phosponites with sterically hindered phenols can improve discoloration effects, the problem should be further reduced in order to fulfill technological requirements.

It is the object of the present invention to provide an improved stabilizer composition for
35 the stabilization of polyolefine-based thermoplastic polymers, such that color stability of the final products is improved.

This object is achieved with the stabilizer composition as hereinunder described. It has surprisingly been found that relatively small additions of aminoacids, particularly of Leucine, to known additive systems result in an unexpected synergistic effect and lead to an effective stabilization of polyolefine-based thermoplastic polymers against discoloration due to the exposure to heat or light, especially in the presence of oxygen. This stabilizer composition according to the invention comprising at least one member of three known additive classes significantly outperforms the additive systems that are known in the art.


Accordingly, the present invention provides a color improving stabilizer composition for polyolefine-based thermoplastic polymers comprising

- a) at least one sterically hindered phenol,
- b) at least one phosphorous-containing secondary antioxidant, and
- c) at least one Leucine compound,

wherein the weight ratio of component (a) to component (b) to component (c) is from 1:5:3 to 2:0,5:0,1, preferably from 1:3:2 to 1:1:0,2.

If in the stabilizer composition according to the present invention more than one compound of component (a), (b) or (c) is present, the definition of the weight ratios always refers to the total amount of component (a), (b) or (c).

The term "Leucine compound" refers to any compound having the basic Leucine structure.



Disclosed are also compounds with variations of the chemical structure of Leucine such as its isomer iso-Leucine

Environmentally friendly, GRAS-listed compounds (GRAS = generally regarded as safe), particularly Leucine, are able to act in small concentrations as color improving

compounds during melt processing of polyolefins. This ability denotes a generally significant technical improvement for processing of a variety of polyolefins.

5 Compared with other aminoacids such as methionine, cystine and cysteine, which contribute to melt stabilization processes, Leucine exhibits, if at all, a much lower efficiency in melt stabilization, but a distinct color improving effect.

As used herein, the term "sterically hindered phenol" refers to those compounds that are preferably derived from 2,6-di-tert.-butyl-phenol, 2-tert.-butyl-6-methylphenol,
10 2-tert.-butyl-5-methylphenol or other hindered phenols.

Preferred examples of such compounds are 2,2'-bis[3,5-[3,5-bis(1,1-dimethylethyl)-4-hydroxyphenyl]-1-oxopropoxy]methyl-1,3-propanediyl-3,5-bis(1,1-dimethylethyl)-4-hydroxybenzenepropanoate; octadecyl-3,5-bis(1,1-dimethylethyl)-4-hydroxybenzene-
15 propanoate; 1,3,5-tris[[3,5-bis(1,1-dimethylethyl)-4-hydroxyphenyl]methyl]-1,3,5-triazine-2,4,6(1H,3H,5H)-trione; 4,4', 4''-[2,4,6-trimethyl-1,3,5-benzenetriyl]tris-(methylene)]tris[2,6-bis(1,1-dimethylethyl)-phenol; ethanediyl-3,5-bis(1,1-dimethylethyl)-4-hydroxy-thiodi-2,1-benzenepropanoate; 2:1 calcium salt of monoethyl-[[3,5-bis(1,1-dimethylethyl)-4-hydroxyphenyl]methyl]-phosphonic acid ester; 2-[3-[3,5-bis(1,1-dimethylethyl)-4-hydroxy-phenyl]-1-oxo-propyl]hydrazide-3,5-bis(1,1-dimethyl-
20 ethyl)-4-hydroxy-benzenepropanoic acid; 2,2'-oxamido-bis-[ethyl-3-(3,5-di-tert.butyl-4-hydroxyphenyl)propionate] or mixtures thereof.

As also used herein, the term "phosphorus-containing secondary antioxidant" refers to
25 compounds being hydroperoxide decomposers, i.e. compounds having the ability to react with hydroperoxides to yield non-radical products, essentially decomposing hydroperoxides into stable by-products. Examples of such compounds are triesters of phosphorous acid (phosphites) and diesters of phosphorous acid (phosphonites).

30 Preferred specific members of the phosphorus-containing secondary antioxidants are triphenylphosphite, tris-isodecylphosphite; tris(nonylphenyl)phosphite; distearyl pentaerythritol diphosphite; 2,4,6-tri-tert.-butyl-phenyl-2-butyl-2-ethyl-1,3-propanediol phosphite; bis(2,4-di-tert.-butylphenyl)-pentaerythrityl diphosphite; 2,2',2''-nitrilo triethyl-tris-[3,3',5,5'-tetra-tert.-butyl-1,1'-biphenyl-2,2'-diyl]phosphite; bis[2,4-di-tert.-butyl-6-
35 methyl-phenyl]ethyl phosphite; 2,2'-ethylidene-bis-(4,6-di-tert.-butylphenyl)-fluorophos-

phite; tris-(2,4-di-tert.-butylphenyl)phosphite; the 4,6-di-tert.-butyl-m-cresol condensation products with the Friedel-Crafts-reaction products of biphenyl and phosphorus trichloride; tetrakis [2,4-di-tert.-butylphenyl]-4,4'-biphenylene-diphosphonite; the condensation products of 2,4-di-tert.-butylphenol with the Friedel-Crafts-reaction product of biphenyl and PCl_3 .

Suitable polyolefin-based thermoplastic polymers to be stabilized according to the instant invention are for example the following ones:

1. Polymers of monoolefins and diolefins, for example polypropylene, polyisobutylene, polybut-1-ene, poly-4-methylpent-1-ene, polyisoprene or polybutadiene, as well as polymers of cycloolefins, for example of cyclopentene or norbornene; furthermore polyethylene (which optionally can be crosslinked); for example, high density polyethylene (HDPE), polyethylene of high density and high molar mass (HDPE-HMW), polyethylene of high density and ultrahigh molar mass (HDPE-UHMW), medium density polyethylene (HMDPE), low density polyethylene (LDPE), linear low density polyethylene (LLDPE), branched low density polyethylene (BLDPE).
2. Mixtures of the polymers mentioned under 1), for example mixtures of polypropylene with polyisobutylene, polyethylene with polyisobutylene, polypropylene with polyethylene (for example PP/HDPE/LDPE) and mixtures of different types of polyethylene (for example LDPE/HDPE) with one another.
3. Copolymers of monoolefins and diolefins with each other or with other vinyl monomers, for example ethylene-propylene copolymers, linear low density polyethylene (LLDPE) and mixtures thereof with low density polyethylene (LDPE), propylene-but-1-ene copolymers, propylene-isobutylene copolymers, ethylene-but-1-ene copolymers, ethylene-hexene copolymers, ethylene-methylpentene copolymers, ethylene-heptene copolymers, ethylene-octene copolymers, propylene-butadiene copolymers, isobutylene-isoprene copolymers, ethylene-alkyl acrylate copolymers, ethylene-alkyl methacrylate copolymers, ethylene-vinyl acetate copolymers and their copolymers with carbon monoxide or ethylene-acrylic acid copolymers and their salts (ionomers) as well as terpolymers of ethylene with propylene and a diene such as hexadiene, dicyclopentadiene or ethylidene-norbornene; and mixtures of such copolymers with one another and

with polymers mentioned under 1), for example polypropylene-ethylene-propylene copolymers, LDPE-ethylene-vinyl acetate copolymers, LDPE-ethylene-acrylic acid copolymers, LLDPE-ethylene-vinyl acetate copolymers, LLDPE-ethylene-acrylic acid copolymers and alternating or random polyalkylene-carbon monoxide copolymers and mixtures thereof with other polymers, for example polyamides.

The phosphites and phosphonites as well as the sterically hindered phenols disclosed above can be synthesized by techniques well known in the art from known compounds. They are commercially available. A selection of compounds including their tradenames as well as their chemical structural formulae are listed in table 1.

The stabilizer composition of the present invention may be produced by simple physical mixing of the compounds (a), (b) and (c) in the desired weight ratio according to known methods. A preferred method is the dry blending of the components resulting in a free-flowing mixture which may be further subjected to a pre-extrusion step in order to achieve homogeneity and easy-to-handle pellets. The process for producing the stabilizer composition is a further aspect of the present invention.

A masterbatch composition comprising a stabilizer composition according to the invention and a thermoplastic material which is identical to or compatible with the thermoplastic polymer to be stabilized is similarly an object of the invention. Masterbatch compositions according to the invention comprise 10 to 80 % by weight, preferably 5 to 25 % by weight of the stabilizer composition and 90 % to 20 % by weight, preferably 95 to 75 % by weight of the afore-mentioned thermoplastic material.

The invention also provides a method for enhancing the color stability of polyolefine-based thermoplastic polymers comprising - incorporating therein at any convenient state of the processing - a stabilizing quantity of the stabilizer composition. This can be carried out according to known methods and may involve the incorporation of the stabilizer composition as such or in the form of the above-mentioned masterbatch. Also, the individual components can be incorporated separately in the correct ratio.

The concentration of the stabilizer composition amounts from 0.001 to 5 %, preferably from 0.01 to 1 %, more preferably from 0.1 to 0.5 % by weight, based on the weight of the polyolefine-based thermoplastic polymers to be stabilized.

The present invention further embraces a stabilized polyolefine-based thermoplastic polymer and any article manufactured therefrom that has been stabilized by the incorporation therein a stabilizing quantity of the stabilizer composition according to the present invention.

The polymer can contain other components such as organophosphanes, benzofuranone-based processing stabilizers, polyphenols and/or hydroxychroman-derivatives, other aminoacid-based stabilizers, sterically hindered piperidine-based light-and heat-stabilizers (HA[L]S), optical brighteners, UV absorbers, U.V. quenchers, acid scavengers, metal desactivators, nucleating agents, fillers, antistatic agents, plastizicers, lubricants, dyes, pigments, emulsifiers, flame retardants, blowing agents, crosslinking agents, antiblocking agents, slip agents, thiosynergists and processing aids.


The invention relates also to those of the mentioned additives, which are used in form of nano-sized particles.

TABLE 1

Trade names, chemical names and chemical structural formulae of the individual components of the stabilizer composition used in the examples.


Hostanox® O10 (Clariant)

tetrakis(methylene(3,5-di-tert.butyl-4-hydroxyphenyl)-hydrocinnamate

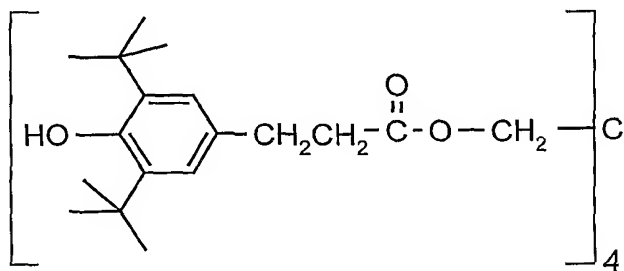


Hostanox® 016 (Clariant)

octadecyl-3,5-bis(1,1-dimethylethyl)-4-hydroxybenzenepropanoate



Hostanox® PAR 24 (Clariant)


tris(2,4-di-tert.-butylphenyl)phosphite



Sandostab®P-EPQ (Clariant)

Composed of

- 1) 50-80 parts of tetrakis(2,4-di-tert.-butylphenyl)-biphenylene-diphosponite

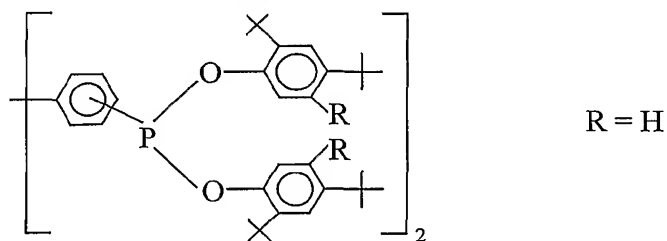


- 2) 10-25 parts of bis(2,4-di-tert.-butylphenyl)biphenylene-monophosponite

- 3) 10-25 parts of tris(2,4-di-tert.-butylphenyl)phosphite

Ultrinox 626 (General Electric)

bis(2,4-di-tert-butylphenyl)-pentaerythritol-diphosphite



The following non limiting examples shall demonstrate the instant invention in more detail.

EXAMPLES**Processing of Polyethylene-LLD**

100 parts by weight of low linear density polyethylene (PE-LLD), type F-30 FG-N, producer Mitsubishi (internal code LL 96-2) [MFI: 0.9 g/10min / 190 °C/2.16 kg] has
5 been mixed in a laboratory mixer from Kenwood adding 0.03 parts by weight of Hostanox O 16, 0.05 parts by weight of Zn-stearate, 0.04 parts by weight of Sandostab P-EPQ and 0.01 parts by weight of D,L-Leucine. Afterwards pre-extrusion was carried out using a single screw extruder type Collin (screw compression 1:3, die diameter 3 mm, screw speed 80 rpm) at 210°C. The main extrusions (1st-5th) took place using a
10 single screw extruder type Göttfert Extrusimeter (screw-compression 1:3, 70 rpm, die-diameter 4 mm) with 4 heating zones each at T=240°C. Color has been measured according to DIN 6167 using a Minolta spectrophotometer. The corresponding color-results are listed in the following table 2. YI stands for Yellowness Index and measures the technically undesired yellowing, a low number indicates high color stability. The
15 number after YI defines the number of extrusion passes.

Results received according to this procedure are shown in the tables 2-4. All numbers referring to the amount of stabilizing compounds are parts by weight.

20

TABLE 2**Color (YI) data**

stabilizer formulation (base stabilization: 0.03 Hostanox 016; 0.05 Zn-stearate)	1st pass	3rd pass	5th pass
0.04 Sandostab P-EPQ (reference 1)	1.75	2.56	2.78
0.05 Sandostab P-EPQ (reference 2)	1.63	2.20	2.44
0.07 Sandostab P-EPQ (reference 3)	1.46	2.64	2.34
0.04 Sandostab P-EPQ + 0.01 D,L-Leucine	0.52	1.18	1.77

25

TABLE 3

Processing of PE-LLD by multiple pass extrusion at T=220 °C

stabilizer concentration	STABILIZER	Yellowness Index			
		Y10	Y11	Y13	Y15
0.05000	ZINC STEARATE				
0.03000	HOSTANOX 016	Y10	Y11	Y13	Y15
0.05000	SANDOSTAB P-EPQ ref.	-1,08	-0,65	2,04	4,40
0.0500	ZINC STEARATE				
0.0300	HOSTANOX 016	Y10	Y11	Y13	Y15
0.0800	SANDOSTAB P-EPQ ref.	-1,56	-0,40	1,95	3,04
0.0500	ZINC STEARATE				
0.0300	HOSTANOX 016				
0.0450	SANDOSTAB P-EPQ ref.	Y10	Y11	Y13	Y15
0.0050	DL-LEUCINE	-1,29	-0,80	1,06	1,84
0.0500	ZINC STEARATE				
0.0300	HOSTANOX 016				
0.0400	SANDOSTAB P-EPQ ref.	Y10	Y11	Y13	Y15
0.0050	DL-LEUCINE	-1,15	-1,53	1,17	4,63
0.0050	DL-ALPHA-TOCOPHEROL E 307				
0.0500	ZINC STEARATE				
0.0300	HOSTANOX 016				
0.0400	SANDOSTAB P-EPQ ref.	Y10	Y11	Y13	Y15
0.0025	DL-LEUCINE	-0,28	-0,67	1,82	4.83
0.0075	DL-ALPHA-TOCOPHEROL E 307				
0.0500	ZINC STEARATE				
0.0300	HOSTANOX 016				
0.0400	SANDOSTAB P-EPQ ref.	Y10	Y11	Y13	Y15
0.0075	DL-LEUCINE	-1,16	-1,37	0,95	4,04
0.0025	DL-ALPHA-TOCOPHEROL E 307				

TABLE 4

Processing of PE-LLD by multiple pass extrusion at T=220 °C

stabilizer concentration	STABILIZER	Yellowness Index			
		YI0	YI1	YI3	YI5
0.0500	ZINC STEARATE				
0.0300	HOSTANOX 016	YI0	YI1	YI3	YI5
0.0500	SANDOSTAB P-EPQ ref.	-1,06	0,55	3,44	4,87
0.0500	ZINC STEARATE				
0.0300	HOSTANOX 016				
0.0400	SANDOSTAB P-EPQ ref.				
0.0025	TEA POLYPHENOL LIGHT GREEN	YI0	YI1	YI3	YI5
0.0075	DL-LEUCINE	-0,19	0,58	1,92	2,91
0.0500	ZINC STEARATE				
0.0300	HOSTANOX 016				
0.0400	SANDOSTAB P-EPQ ref.				
0.0050	TEA POLYPHENOL LIGHT GREEN	YI0	YI1	YI3	YI5
0.0050	DL-LEUCINE	3,49	3,09	4,02	4,58
0.0500	ZINC STEARATE				
0.0300	HOSTANOX 016				
0.0400	SANDOSTAB P-EPQ ref.				
0.0075	TEA POLYPHENOL LIGHT GREEN	YI0	YI1	YI3	YI5
0.0025	DL-LEUCINE	8,78	9,65	8,86	9,13

- 5 The addition of Leucine clearly improves the color stability. Even in a less color stable system where Sandostab P-EPQ partially has been replaced by α -tocopherol or by tea polyphenol light green (natural polyphenols gained from herbal extracts, like extracts from green tea), increasing the amount of Leucine still leads to an improvement of color stability.

PROCESSING OF POLYPROPYLENE

100 parts by weight of polypropylene (PP), type Eltex P, producer Solvay (internal code PP 99-10) [MFI: 3.3 g/10min / 230 °C/2.16 kg] has been mixed in a laboratory mixer from Kenwood adding 0.05 parts by weight of Hostanox O 10, 0.05 parts by weight of Ca-stearate, 0.05 parts by weight of Sandostab P-EPQ and 0.01 parts by weight of D,L-Leucine. Alternatively used as phosphorous-based processing are 0.5 parts by weight Ultrinox 626 or alternatively 0.025 parts Sandostab P-EPQ together with 0.025 parts Hostanox PAR 24 or alternatively 0.0225 parts Sandostab P-EPQ together with 0.0225 parts Hostanox PAR 24 and together with 0.005 parts α -tocopherol. Afterwards pre-extrusion was carried out using a single screw extruder type Haendle KPS 25 (screw compression 1:3, die diameter 4 mm, screw speed 80 rpm) at 220°C. The main extrusions (1st-5th) took place using a single screw extruder type Göttfert Extrusimeter (screw-compression 1:3, 50 rpm, die-diameter 2 mm) with 4 heating zones each at T=240°C or alternatively at T= 270°C or alternatively at 300°C. Color has been measured according to DIN 6167 using a Minolta spectrophotometer. A selection of corresponding color-results is listed in the following tables 5 A-C.

TABLE 5 A

Processing of polypropylene by multiple pass extrusion at T=240 °C

stabilizer conc.	STABILIZER	Yellowness Index			
0.1000	CALCIUM STEARATE DW				
0.0500	HOSTANOX O 10				
0.0225	SANDOSTAB P-EPQ ref.				
0.0225	Hostanox PAR 24 <i>Blend</i>	YI0	YI1	YI3	YI5
0.0050	α -tocopherol	3.27	5.32	11.29	15.30
0.1000	CALCIUM STEARATE DW				
0.0500	HOSTANOX O 10				
0.0225	SANDOSTAB P-EPQ ref.				
0.0225	Hostanox PAR 24 <i>Blend</i>				
0.0050	α -tocopherol	YI0	YI1	YI3	YI5
0.0100	DL-LEUCINE	2.08	2.58	7.45	13.08

0.1000	CALCIUM STEARATE DW				
0.0500	HOSTANOX O 10				
0.0450	Ultrinox 626	YI0	YI1	YI3	YI5
0.0050	α -tocopherol	2.03	2.53	5.23	10.22
0.1000	CALCIUM STEARATE DW				
0.0500	HOSTANOX O 10				
0.0450	Ultrinox 626				
0.0050	α -tocopherol	YI0	YI1	YI3	YI5
0.0100	DL-Leucine	1.24	1.74	4.83	8.02

TABLE 5 B

5 Processing of polypropylene by multiple pass extrusion at T=270 °C

stabilizer concentration	STABILIZER	Yellowness Index			
0.1000	CALCIUM STEARATE DW				
0.0500	HOSTANOX O 10				
0.0225	SANDOSTAB P-EPQ ref.				
0.0225	Hostanox PAR 24	YI0	YI1	YI3	YI5
0.0050	α -tocopherol	3.27	5.00	9.52	15.47
0.1000	CALCIUM STEARATE DW				
0.0500	HOSTANOX O 10				
0.0225	SANDOSTAB P-EPQ ref.				
0.0225	Hostanox PAR 24				
0.0050	α -tocopherol	YI0	YI1	YI3	YI5
0.0100	DL-LEUCINE	2.15	3.11	8.85	12.54
0.1000	CALCIUM STEARATE DW				
0.0500	HOSTANOX O 10				
0.0450	Ultrinox 626	YI0	YI1	YI3	YI5
0.0050	α -tocopherol	2.11	5.20	9.85	13.40

0.1000	CALCIUM STEARATE DW				
0.0500	HOSTANOX O 10				
0.0450	Ultrinox 626				
0.0050	α -tocopherol	YI0	YI1	YI3	YI5
0.0100	DL-Leucine	1.44	2.45	7.18	12.91

TABLE 5 C

5 Processing of polypropylene by multiple pass extrusion at T=300 °C

stabilizer concentration	STABILIZER	Yellowness Index			
0.1000	CALCIUM STEARATE DW				
0.0500	HOSTANOX O 10				
0.0225	SANDOSTAB P-EPQ ref.				
0.0225	Hostanox PAR 24	YI0	YI1	YI3	YI5
0.0050	α -tocopherol	2.91	4.91	9.70	13.14
0.1000	CALCIUM STEARATE DW				
0.0500	HOSTANOX O 10				
0.0225	SANDOSTAB P-EPQ ref.				
0.0225	Hostanox PAR 24				
0.0050	α -tocopherol	YI0	YI1	YI3	YI5
0.0100	DL-LEUCINE	1.82	3.28	7.23	10.25
0.1000	CALCIUM STEARATE DW				
0.0500	HOSTANOX O 10				
0.0450	Ultrinox 626	YI0	YI1	YI3	YI5
0.0050	α -tocopherol	2.51	5.00	10.76	14.55
0.1000	CALCIUM STEARATE DW				
0.0500	HOSTANOX O 10				
0.0450	Ultrinox 626				
0.0050	α -tocopherol	YI0	YI1	YI3	YI5

0.0100	DL-Leucine	1.10	2.02	6.88	12.40
--------	------------	------	------	------	-------

The results clearly show that also in polypropylene the instant stabilizer composition leads to significantly improved color stability.

CLAIMS

1. A color improving stabilizer composition for polyolefine-based thermoplastic polymers comprising
 - a) at least one sterically hindered phenol,
 - b) at least one phosphorus-containing secondary antioxidant, and
 - c) at least one Leucine compound,
 wherein the weight ratio of component (a) to component (b) to component (c) is from 1:5:3 to 2:0,5:0,1.
2. A composition according to claim 1 wherein the weight ratio of component (a) to component (b) to component (c) is from 1:3:2 to 1:1:0,2.
3. A composition according to claim 1 or 2 wherein the Leucine compound is Leucine.
4. A composition according to any preceding claim wherein the sterically hindered phenol is 2,2'-bis[3,5-[3,5-bis(1,1-dimethylethyl)-4-hydroxyphenyl]-1-oxopropoxy]methyl-1,3-propanediyl-3,5-bis(1,1-dimethylethyl)-4-hydroxybenzenepropanoate; octadecyl-3,5-bis(1,1-dimethylethyl)-4-hydroxybenzenepropanoate; 1,3,5-tris[[3,5-bis(1,1-dimethylethyl)-4-hydroxyphenyl]methyl]1,3,5-triazine-2,4,6(1H,3H,5H)trione; 4,4',4''-[2,4,6-trimethyl-1,3,5-benzenetriyl]tris-(methylene)-[tris[2,6-bis(1,1-dimethylethyl)-phenol]; ethanediyl-3,5-bis(1,1-dimethylethyl)-4-hydroxy-thiodi-2,1-benzenepropanoate; 2:1 calcium salt of monoethyl-[[3,5-bis(1,1-dimethylethyl)-4-hydroxyphenyl]-methyl]-phosphonic acid ester; 2-[3-[3,5-bis(1,1-dimethylethyl)-4-hydroxy-phenyl]-1-oxopropyl]-hydrazide-3,5-bis(1,1-dimethylethyl)-4-hydroxy-benzene-propanoic acid; 2,2'-oxamido-bis-[ethyl-3-(3,5-di-tert.-butyl-4-hydroxyphenyl)-propionate] or mixtures thereof.
5. A composition according to any preceding claim wherein the phosphorous-containing secondary antioxidant is triphenylphosphite, tris-isodecylphosphite;

- tris(nonylphenyl)phosphite; distearyl pentaerythritol diphosphite; 2,4,6-tri-tert.-butylphenyl-2-butyl-2-ethyl-1,3-propanediol phosphite; bis(2,4-di-tert.-butylphenyl)-pentaerythrityl diphosphite; 2,2',2''-nitrilo triethyl-tris[3,3',5,5'-tetra-tert.-butyl-1,1'-biphenyl-2,2'-diyl]phosphite; bis[2,4-di-tert.-butyl-6-methyl-phenyl]ethyl phosphite; 2,2'-ethylidene-bis-(4,6-di-tert.-butylphenyl)-fluorophosphite; tris(2,4-di-tert.-butylphenyl)phosphite; the 4,6-di-tert.-butyl-m-cresol condensation products with the Friedel-Crafts-reaction products of biphenyl and phosphorous trichloride; tetrakis [2,4-di-tert.-butylphenyl]-4,4'-biphenylenediphosphonite; the condensation products of 2,4-di-tert.-butylphenol with the Friedel-Crafts-reaction product of biphenyl and PCl_3 .
6. A method for enhancing the color stability of polyolefine-based thermoplastic polymers comprising incorporating therein before or during processing a stabilizing quantity of the stabilizer composition according to any of claims 1 to 5.
 7. A method according to claim 6 wherein the stabilizer composition is added in an amount of from 0.001 to 5 % by weight, preferably from 0.01 to 1 % by weight, more preferably from 0.1 to 0.5 % by weight, based on the thermoplastic polymer.
 8. A process for producing a stabilizer composition according to any of claims 1 to 5 comprising mixing the components (a), (b) and (c) in the weight ratios given in claim 1 or 2.
 9. A masterbatch composition comprising a stabilizer composition according to any of claims 1 to 5 and a thermoplastic material.
 10. A masterbatch composition according to claim 9 comprising 10 to 80 % by weight, preferably 5 to 25 % by weight of the stabilizer composition and 90 to 20 % by weight, preferably 95 to 75 % by weight of said thermoplastic material.

INTERNATIONAL SEARCH REPORT

International Application No

PCT/IB 02/00521

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 C08K5/00 C08K5/13 C08K5/52 C08K5/17

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C08K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, COMPENDEX

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 336 264 A (MITSUBISHI RAYON CO) 11 October 1989 (1989-10-11) page 3, line 1 - line 21 page 3, line 47 - page 4, line 12 table 3 claims 1-5	1-11
A	WO 97 49758 A (CLARIANT INTERNATIONAL LIMITED ; STOLL KLAUS (DE); MALIK JAN (FR);) 31 December 1997 (1997-12-31) page 2, line 12 - page 3, line 31 claims 1-11	1-11
A	EP 0 407 139 A (KYOWA CHEM IND CO LTD) 9 January 1991 (1991-01-09) page 4, line 5 - line 39 claims 1-7	1-11

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

* & * document member of the same patent family

Date of the actual completion of the international search

23 May 2002

Date of mailing of the international search report

10/06/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Denis, C

INTERNATIONAL SEARCH REPORT
Information on patent family members

International Application No
PCT/IB 02/00521

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0336264	A	11-10-1989	JP 1245044 A	29-09-1989
			AU 629819 B2	15-10-1992
			AU 3172389 A	28-09-1989
			CA 1335847 A1	06-06-1995
			DE 68907248 D1	29-07-1993
			DE 68907248 T2	10-02-1994
			EP 0336264 A1	11-10-1989
			ES 2055753 T3	01-09-1994
			US 5008313 A	16-04-1991
WO 9749758	A	31-12-1997	DE 69704864 D1	21-06-2001
			DE 69704864 T2	18-04-2002
			EP 0907676 A1	14-04-1999
			ES 2159866 T3	16-10-2001
			WO 9749758 A1	31-12-1997
			JP 2001501984 T	13-02-2001
EP 0407139	A	09-01-1991	JP 2758031 B2	25-05-1998
			JP 3037238 A	18-02-1991
			DE 69016112 D1	02-03-1995
			DE 69016112 T2	18-05-1995
			EP 0407139 A1	09-01-1991
			US 5106898 A	21-04-1992